




REVOX 5W-40 SP/C3

PRODUCT DESCRIPTION

Revox 5W-40 SP/C3 is a full synthetic lubricant developed for passenger cars, RV, light trucks and SUV that run on gasoline, diesel or LPG engines.

This product is a mid SAPS oil that provides protection for exhaust after treatment devices. It's excellent fluidity at cold temperatures assures and easy start-stop and good drivability.

Formulated to meet the API SP and ACEA C3 specifications, this product will offer a complete engine protection and a high engine cleanliness.

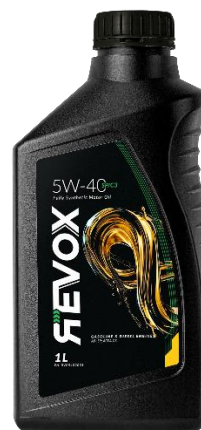

APPLICATIONS

- Passenger cars, RV, light truck, SUV with gasoline and diesel engine
- Particularly vehicles driving in modern start-stop traffic condition
- Vehicles with DOHC, Turbocharger, CRDI, Catalytic converters
- Diesel vehicles equipped with after-treatment, devices including EGR, DPF(Diesel Particulate Filter)

Important notice: The manufacturers' instructions should always be followed

SPECIFICATIONS & APPROVALS

API SP; ACEA C3

PROPERTIES

- Protection of the aftertreatment devices, including DPF
- Easy start and good drivability (start-stop conditions)
- Thermal stability for optimal engine protection
- Outstanding engine cleanliness




TECHNICAL DATA

Parameter	Test Method	Unit	Result
Viscosity Grade	SAEJ 300	-	5W-40
Density at 15°C		g/cm ³	0.8520
Viscosity @ 40°C	ASTM D445	mm ² /s	78.06
Viscosity @ 100°C	ASTM D445	mm ² /s	14.60
Viscosity Index	ASTM D2270	-	172
Flash Point		°C	232
Pour Point		°C	-42

